
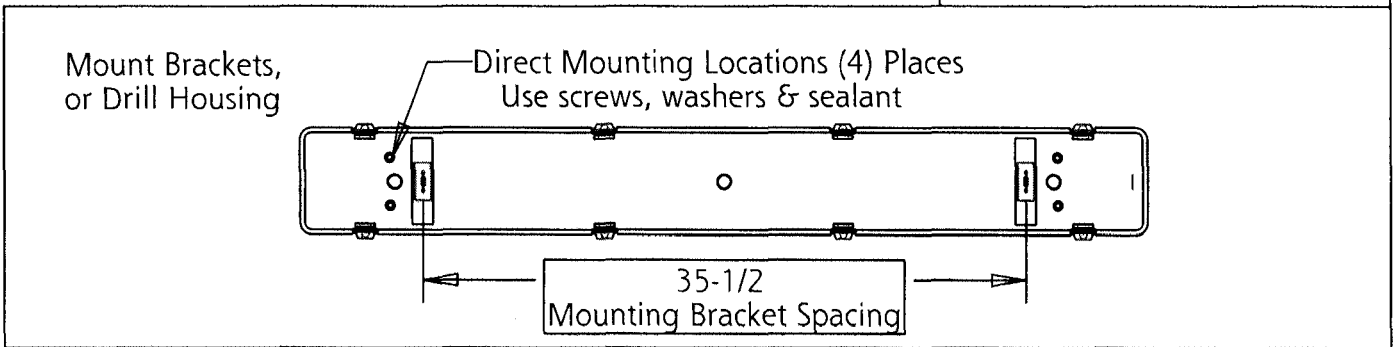


KASON INDUSTRIES, INC

Model 1810 "EZ" Series Fluorescent Light Fixture

Installation Instructions:

1. Remove all packaging from housing and ballast area.
2. Mount fixture using supplied brackets or by screws through the housing. (See figure below for screw locations). Use hardware sufficient to support the weight of the fixture and associated conduit.
3. Mount conduit hub into open end of housing and wire as required.
4. Connect to fixture leads - Hot to Black, Neutral to White. Green Ground wire at marked location on Tray.
5. Snap the Tray into place. Check for security.
6. Install lamps. (See lamp types below)
7. Install the Lens Clips and lock the Lens in place. (Lens must be seated into gasket channel with all latches to provide water tightness)

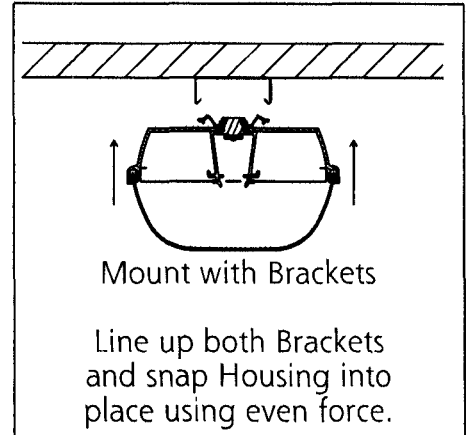

WARNINGS AND CAUTIONS:

- A. All installation must comply with Local and National Electrical Codes. The manufacturer assumes no responsibility for improper installation, or application of this lighting fixture.
- B. All supply wires must be suitable for 90° C.
- C. Turn off all electricity before installation. Electricity should be turned off prior to servicing.
- D. This "FIXTURE MUST BE GROUNDED".
- E. Ensure that the ballast voltage matches the available supply voltage.
- F. Verify a secure connection at the mounting brackets. Use a direct mounting method if the brackets fail to snap securely to the housing.
- G. **⚠ CAUTION** - Risk of Damage. Use ONLY the lamp rated for this fixture.
- H. When used, the HUB shall be connected to the conduit before connecting to the luminaire.

MODEL#	DESCRIPTION	LAMP TYPE
1810EZUV48L	LIGHT 4FT, -20° F, 2-LAMP x 54W, 120V-277V T5HO	F54T5HO (HIGH OUTPUT)
1810EZUV48LC	LIGHT 4FT, 0° F, 2-LAMP x 32W, 120V-277V T8	F32T8

For additional information contact your local KASON representative at (800)-93-KASON