

1908-604 WATER PROOF 4 WAY SWITCH

INSTALL:

1. Snap switch into bracket. Fill conduit around wires with sealant.
2. Connect ground wire to green screw on bracket.
3. Connect wires to switch using ¼" spade connectors.
4. Mount to junction box using two #6 x ¾" pan head screw.

Recessed type junction box with minimum depth of 2-1/8" required.

5. Install the cover plate with #6-32 x ¾" oval head screws.
Open holes in cover plate using 1/8" drill or sharp tool.

ELECTRICAL SPECS:

Rating:

- 20 A @ 120 VAC General Use
- 5 A @ 125 VAC Tungsten
- 5 A @ 250 VAC Ballasted
- 4.9 A @ 125 VAC Electronic Ballast

Circuit:

Switch: DPDT

Indicator: "ON" when switch is "OFF"
"Nightlight"

UL Recognized


WARNING:

Wiring this switch or any other improperly can result in electrical shock, fire and / or death. Installer must follow all local building codes and laws for electrical installations.


FOR WIRE DIAGRAM BELOW: "NIGHTLIGHT" Indicator

Indicator in the 1908-603 will light when load is "ON" / 1908-604 will be "OFF"


Indicator in the 1908-603 will not light when load is "OFF" / 1908-604 will be "ON"

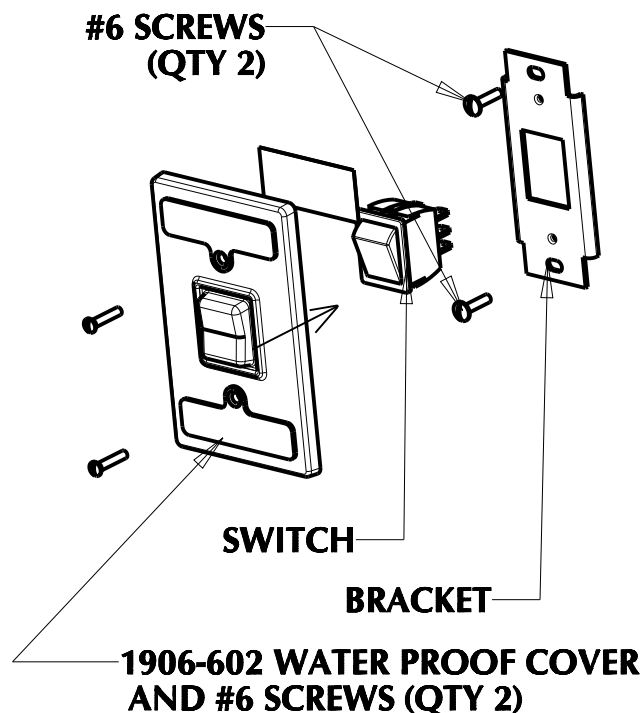

NOTICE! CONNECT ONLY COPPER
OR COPPER CLAD WIRE TO THIS DEVICE!

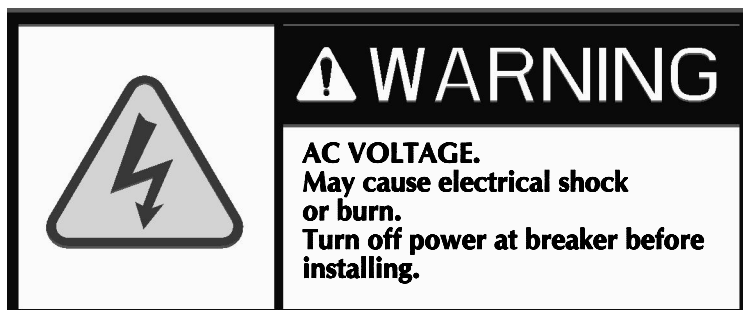

WIRING DIAGRAM

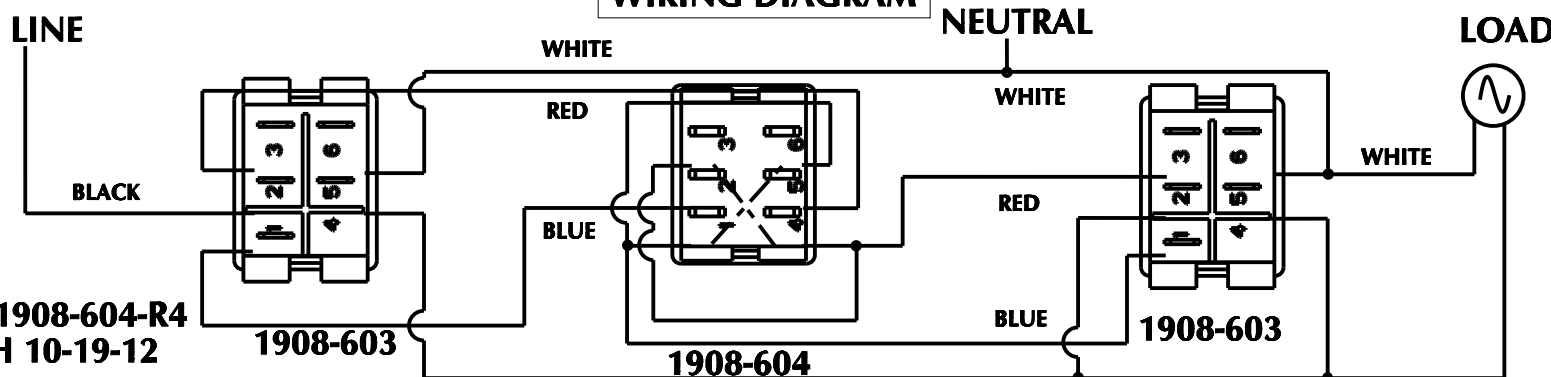

IS-1908-604-R4
RJH 10-19-12



www.P65Warnings.ca.gov

BLACK

BLACK

BLACK

WARNING This item may contain chemicals known to cause cancer or reproductive harm in the State of California.